




WITT Dome-loaded Pressure Regulators are engineered to optimize performance and value, for a wide range of applications.

Made in Germany.  
Made by WITT.

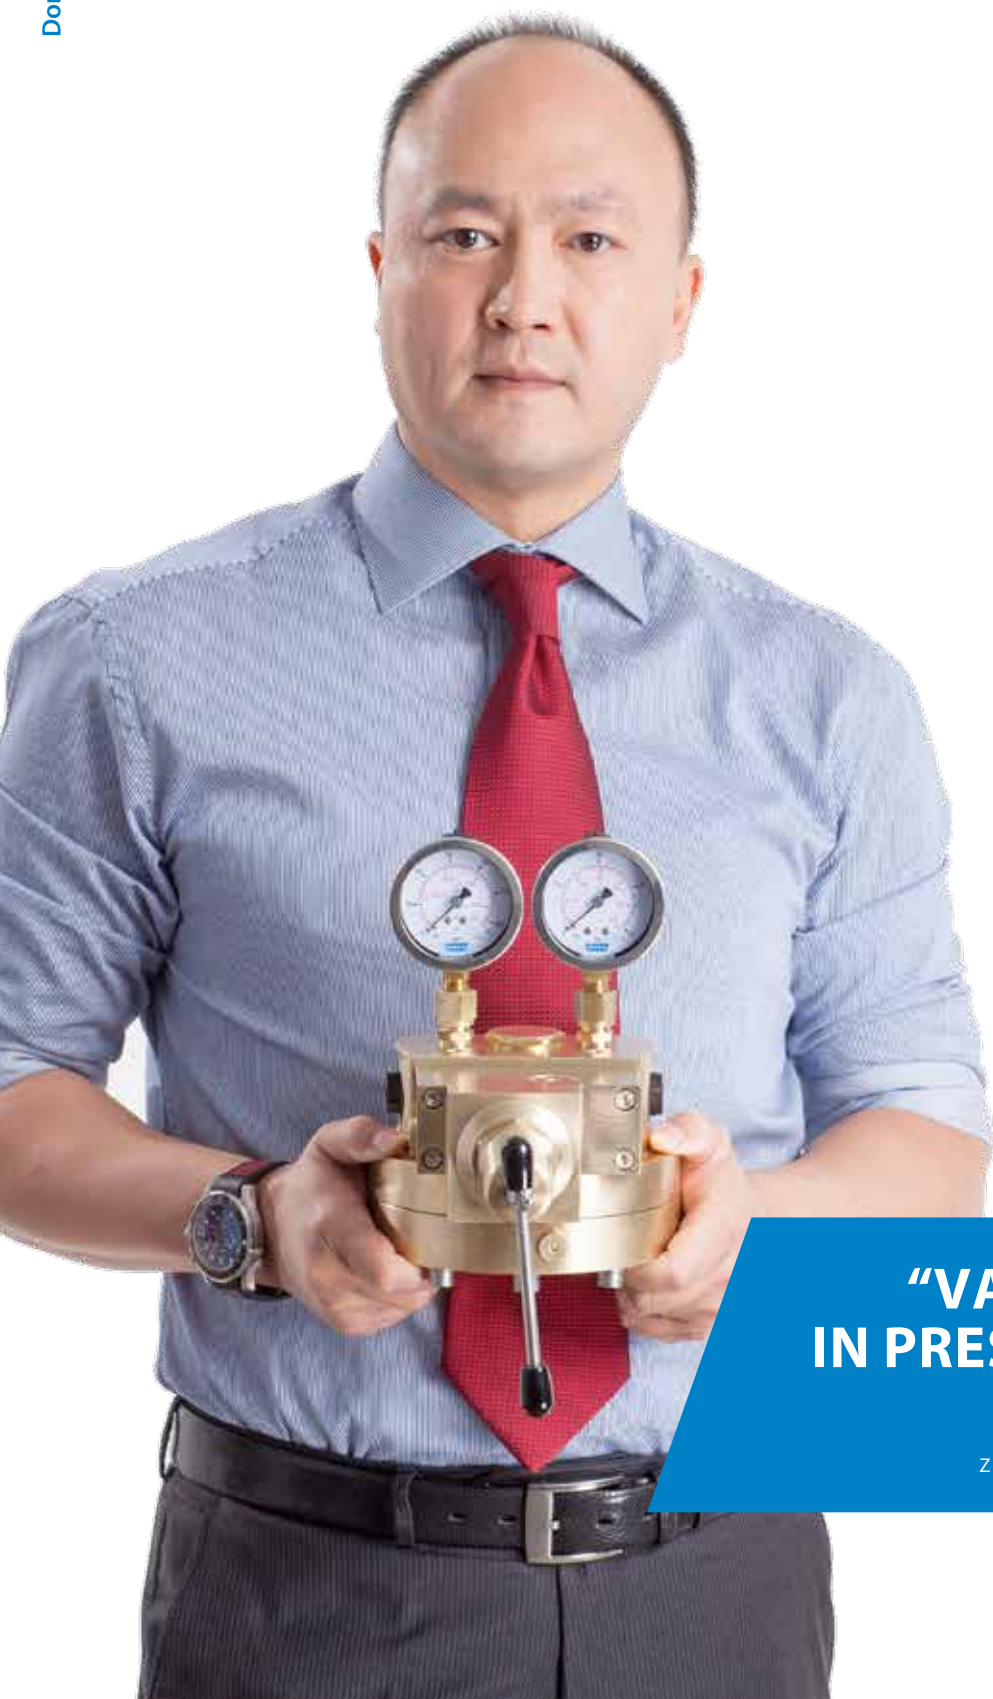

**“VALUE ENGINEERING”  
IN PRESSURE REGULATION**

ZHENG ZHANG, SALES MANAGER WITT-GASESTECHNIK

# PERFORMANCE AND ECONOMIC ADVANTAGES

WITT Dome-loaded Pressure Regulators – designed to meet your Value Engineering criteria.

## ➤ MAXIMUM ACCURACY AND STABILITY IN PRESSURE REGULATION

Even when flow rates and temperatures are changing, and when the inlet pressure is falling to within 14.5 psi (1 bar) of the required outlet pressure, WITT dome-loaded pressure regulators maintain control, improving the downstream process performance.

## ➤ ULTRA-LOW INSTALLATION AND MAINTENANCE REQUIREMENTS


WITT domes come fully assembled and tested, own-medium controlled, CE-marked, complete with gauges and built-in pilot pressure regulator, as a complete set, ready-to-go.

## ➤ SHORT LEAD TIMES AND WORLDWIDE SERVICE

Most standard WITT dome-loaded pressure regulators are available ex-works in less than 1 week. WITT's world-wide network of subsidiaries and partners provides the technical support.

### Performance of WITT dome-loaded pressure regulators compared to three main competitors, measured with N<sub>2</sub>. Example: WITT model 747LE/S

All WITT performance data validated by customers – details available on request.

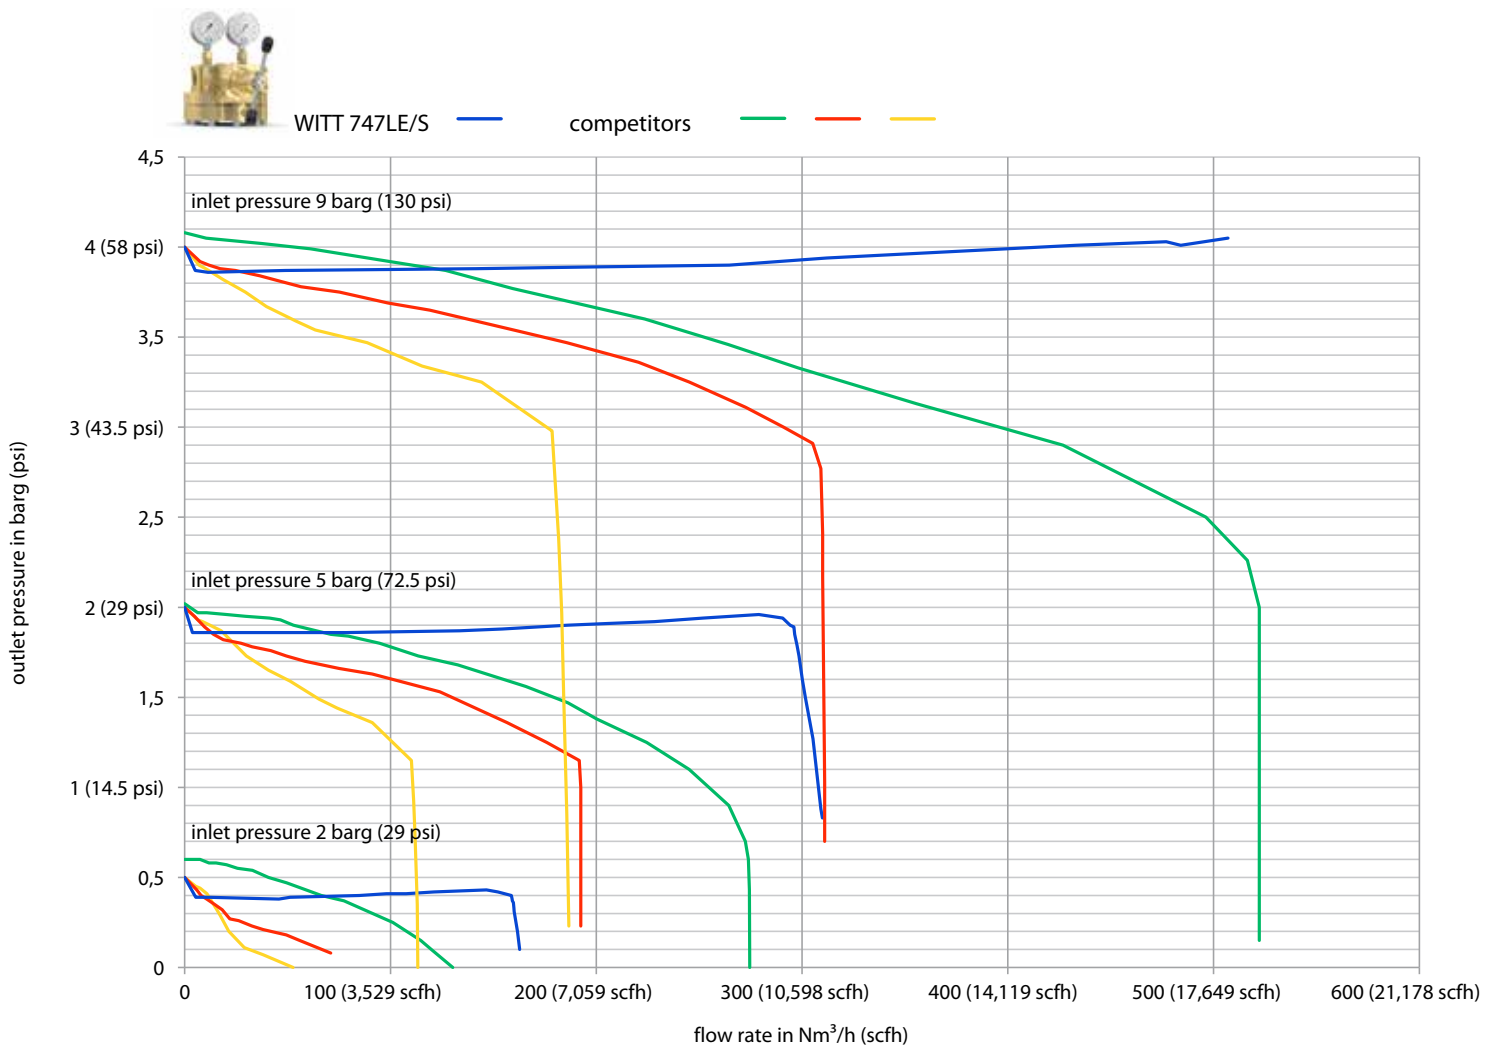

NOTE: full range of pressures and flows available – see next page. Other models available – see page 5.

## APPLICATIONS

Areas of use, specific requirements, benefits.

### EXAMPLES:

#### › CRYOGENIC TANK VAPORIZER OUTLETS

- A back-up supply to a 24/7 gas generator – the back-up will cut in at precisely the right pressure and will be seamless to the downstream process. This means 100 % availability. Can also be used for peak-shaving.
- Purge gases at high flow rates – at just under the downstream relief valve set-pressure
- Laser-assist gases – accurately delivered without always needing a 536 psi (37 barg) MAWP tank-rating

#### › CO<sub>2</sub> SYSTEMS FOR WELDING GASES

- All applications requiring accurate pressure control but with varying flow rates – see case study “Pressure stability improved our customers process” on page 7

#### › HIGH PRESSURE INDUSTRIAL GAS SUPPLIES, SUCH AS TUBE-TRAILERS, CYLINDER BUNDLES AND BUFFER TANKS

- Accurate control and high flow rates, even when the inlet pressure falls to within 14.5 psi (1 bar) above the outlet pressure – meaning more useable gas can be taken, thereby reducing replenishment/logistics costs
- Accurate outlet pressure control from PSAs and VSAs – smoothing out any pressure variations and improving the downstream process performance and safety

#### › PIPELINE GAS CONSUMPTION METERING

- Accurate pressure control meaning increased metering accuracy
- High flow with minimal  $\Delta P$

#### › BUILT INTO COMPRESSORS AND TURBINES

- Accurate outlet pressure control – smoothing out any pressure variations and improving the downstream process performance
- Seal-gases control – reducing friction, energy use and maintenance requirements



#### › WITT RANGE: PRESSURES – FLOWS – GASES – CONNECTIONS


- Our standard LE/S range is for O<sub>2</sub> from 435 psi (30 barg) and for N<sub>2</sub>, Ar, He, H<sub>2</sub>, CH<sub>4</sub> from 580 psi (40 barg) down to 7.2–435 psi (0.5–30 barg), up to 529,720 scfh (15,000 Nm<sup>3</sup>/h) (N<sub>2</sub>), Kv values ranging from 2.4 to 30
- Our high pressure LE-HD/S range is for O<sub>2</sub>, N<sub>2</sub>, Ar, He, H<sub>2</sub>, CH<sub>4</sub> from 4,351 psi (300 barg) down to 7.2–870 psi (0.5–60 barg), up to 84,755 scfh (2,400 Nm<sup>3</sup>/h), Kv value 1.65
- CO<sub>2</sub>-specific versions are available (1,450 psi down to 7.2–377 psi /100 barg down to 0.5–26 barg)
- Standard gas temperature range -22°F to 122°F (-30°C to +50°C)
- Threaded and flanged connections from 3/4" up to 3" / DN100 – DIN or ANSI
- Customized versions are available, e.g. with proportional valves

Technical data sheets available at [www.domepressureregulators.com](http://www.domepressureregulators.com)

## FUNCTION

A unique design for a unique performance.

Dome-loaded pressure regulators are operated with gas pressure. Unlike spring-loaded pressure controllers, the opening force of the valve required for pressure reduction is generated by the pressure of a so-called pilot gas and not by a spring. In the dome-loaded pressure regulator sets from WITT, the gas to be regulated is itself used as the pilot gas („own-medium controlled“). The gas to be regulated is supplied to the dome where it reaches the valve seat. The pilot gas is controlled via a built-in pilot gas regulator and led into the pressure chamber. Here, it acts on a diaphragm whose stroke movement is transferred to the valve seat via a diaphragm plate. So the valve gets opened or closed via the pressure of the pilot gas and the relevant stroke movement of the diaphragm, dependent upon the chosen operating pressure, and the flow required. The excess pilot gas is routed to the outlet pressure side via an integrated non-return valve. Thus, WITT dome pressure regulator sets are closed systems and allow the outlet pressure to be adjusted whilst in service.

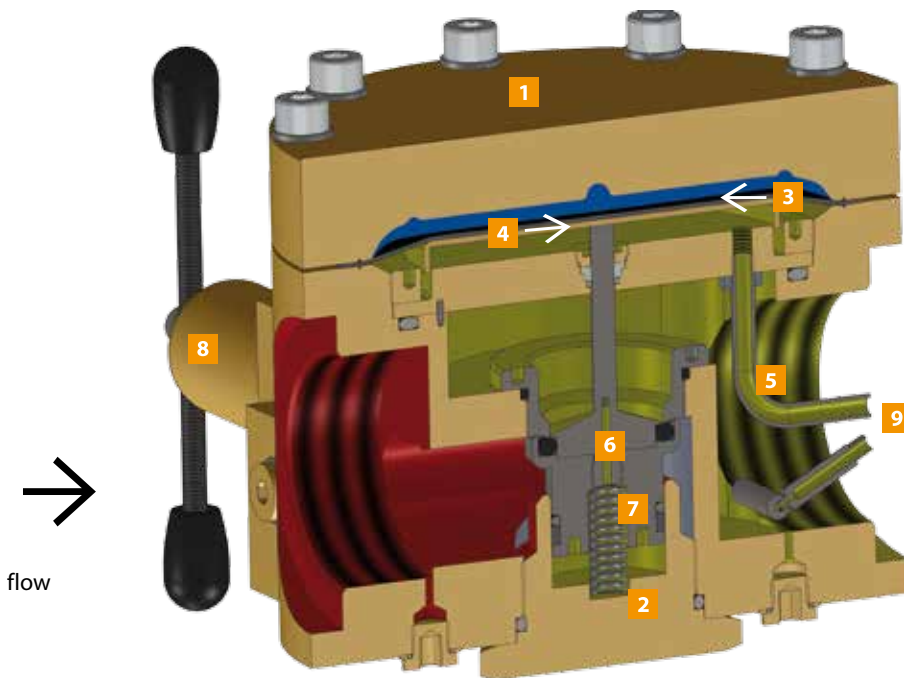

- 1 Body**  
either in brass or in high-quality 1.4404 stainless steel
- 2 Valve seat**
- 3 Diaphragm**  
A large diaphragm with a wide bearing surface on the diaphragm plate enables accurate regulation
- 4 Diaphragm plate**
- 5 Pilot Control Tube**  
does not check the existing outlet pressure on the valve seat but at the output of the pressure regulator where it is relevant for receiving the correct outlet pressure
- 6 Balanced Seat Design**  
Bore hole through the valve seat that leads the outlet pressure under the valve seat and thus balances it out
- 7 Closing spring**
- 8 Pilot Pressure Regulator**
- 9 Routing of the excess pilot gas**  
to the outlet pressure side

■ Inlet pressure    ■ Pilot pressure in pressure chamber    ■ Outlet pressure

## OUR MODELS

### Overview.

#### › DIAPHRAGM

Unlike many other designs, the diaphragm of WITT products is not located directly on the valve seat. Instead, it transfers the stroke movement via a special diaphragm plate. This allows extremely fast adaptation to withdrawal changes. There are no fluctuations in the outlet pressure until the pressure controller finds the correct valve opening. The special diaphragm also enables an extremely wide regulation range. The pressure is accurately regulated even in case of small pressure differences of less than 14.5 psi (1 bar) in the inlet pressure and the outlet pressure. Large pressure differences can also be realized. A 2-stage pressure reduction is therefore not required.

#### › BALANCED SEAT DESIGN

A bore hole through the valve seat and a special sealing of the stroke movement balance out the valve from both sides on an even surface by back pressure. The inlet pressure does not act on the valve piston and the outlet pressure is almost independent of the inlet pressure fluctuations.

#### › PILOT CONTROL TUBE


Unlike other regulators, most of the WITT dome-loaded pressure regulators do not check the existing outlet pressure on the valve seat but at the output of the pressure regulator where it is relevant for the correct outlet pressure control. This allows highest precision in pressure regulation. (Model 737LE/S is without Pilot Control Tube)

#### › PILOT PRESSURE REGULATOR


A major advantage of most of the WITT dome-loaded pressure regulators is their easy and flexible use. The integrated pilot pressure regulator can be used to adjust the operating pressure as soon as a different gas pressure is required at the outlet point or the gas or ambient temperature changes significantly.

#### › CLOSED CONTROL SYSTEM

WITT dome-loaded pressure regulators are flexible regarding the gas supply. The regulated gas (internal medium) is used as pilot gas. Therefore, the dome-loaded pressure regulator works autonomously and the pilot gas is then supplied to the outlet pressure side once again. Gas is thus not used for pressure control and there are no additional costs.





› **737LE/S-HD**  
High Pressure  
(4,351 psi / 300 bar)  
Dome-loaded Pressure  
Regulator Set  
Kv value: 1.65/Cv value: 1.9  
Inlet 3/4" F, incl. inlet filter,  
outlet 1" F, G or NPT  
Special CO<sub>2</sub> model  
available





› **737LE/S**  
Universal  
Dome-loaded Pressure  
Regulator Set  
Kv value: 2.4/Cv value: 2.8  
3/4" F, G or NPT  
incl. inlet filter



› **747LE/S**  
Universal  
Dome-loaded Pressure  
Regulator Set  
Kv value: 3.6/Cv value: 4.2  
1" F, G or NPT  
DIN/ANSI flange



› **757LE/S**  
High Performance  
Dome-loaded Pressure  
Regulator Set  
Kv value: 15/Cv value: 17.4  
2" F, G or NPT  
DIN/ANSI flange



› **767LE/S**  
High Performance  
Dome-loaded Pressure  
Regulator Set  
Kv value: 30/Cv value: 34.8  
3" F, G or NPT  
DIN/ANSI flange

All models with ultra-low maintenance requirements

- Depending on the application, wetted moving parts may need to be replaced every 1–3 years
- Pre-assembled maintenance kits available from stock, ex-works

Technical data sheets available at [www.domepressureregulators.com](http://www.domepressureregulators.com)

# PRACTICAL EXAMPLES

## WITT Dome-loaded Pressure Regulators in industrial plants.

### › AUTOMATED GAS SUPPLY TO FLAME CUTTING MACHINE

The 3 lines for oxygen and propane each go via a dome-loaded pressure regulator. The pilot control gas is regulated via proportional valves controlled by a PLC. Automatic adjustments of the pilot gas pressure regulate the flowrates into the burners, thereby controlling the cutting process.

The dome-loaded pressure regulators minimize any variations, and allow for optimal cutting, at a fraction of the price of a fully electronic control system.

.....



### › NITROGEN SUPPLY SWITCH-OVER UNIT

The customer demanded a very high performance and reliable pressure control of a nitrogen supply for the packaging of potato snacks. To meet this challenge, WITT installed two supply lines in parallel, each with a dome-loaded pressure regulator set 767LE/S.

The gas is regulated from 174 psi (12 bar) down to 87 psi (6 bar). The dome-loaded pressure regulators function independently. To allow for maintenance, ball valves enable each dome to be isolated. This parallel arrangement gives 100 % up-time.

.....

### › REDUNDANCY-CAPABLE PRESSURE CONTROL FOR VACUUM ANNEALING

The process required a constant 145 psi (10 bar) supply of nitrogen into the annealing furnace, from a 188 psi (13 bar) tank. The customer requested a parallel redundant system, plus a roof cover. The average gas flow per furnace should be around 5,297 scfh (150 m<sup>3</sup>/h), and 4 should be mounted, allowing up to 21,188 scfh (600 m<sup>3</sup>/h). To allow for major process upsets requiring emergency N<sub>2</sub> blanketing, a maximum flow rate of 56,503 scfh (1,600 m<sup>3</sup>/h) was set. Because the WITT dome sets are also able to regulate small flows precisely, a single redundancy capability was designed for using the WITT 757LE set.

.....



### › CUSTOMIZED DOME SYSTEM FOR OXYGEN SUPPLY

This customized system, fully assembled in a lockable cabinet, controls the supply of oxygen into an industrial waste water treatment plant. The detailed specification to ensure a flow rate of some 35,314 scfh (1,000 m<sup>3</sup>/h), was drawn up by specialist WITT company Gustus & Partner GmbH in conjunction with the customer, including TÜV certification.

.....

### › REDUNDANT PRESSURE REGULATING STATION DN100 FOR OXYGEN INERTING OF FLAME LANCES (STEEL INDUSTRY)

The customer required an electronic pressure control system, with redundancy, to deliver a minimum flow of 77,692 scfh (2,200 m<sup>3</sup>/h) at up to 203 psi (14 bar), from an inlet pressure of 217 psi (15 bar). This was achieved with one WITT dome pressure regulator 767LE (with proportional control) per line.

.....



## WITT Dome Pressure Regulator HD for welding gas mixtures supply.



Manoj Niraj,  
Project Manager  
at Legris

### › **LEGRIS: “PRESSURE STABILITY IMPROVED OUR CUSTOMER’S WELDING PROCESS”**


Legris India offers gas supply solutions, including gas storage and mixing systems. One such project is supplying welding gas mixtures to Indian Railways at Raebareli. CO<sub>2</sub> (from cylinders) and Argon (from a cryogenic tank) are supplied into WITT Gas Mixers.

Mr Manoj Niraj, Project Manager at Legris, describes the challenge: “We had problems during the commissioning of the system due to not enough CO<sub>2</sub> flow to the mixers through the old CO<sub>2</sub> regulator on the cylinder manifold. Our customer needs stable flow even in fluctuating demands from the mixers depending on the usage rates. And the regulator failed to provide constant pressure to the mixer with fluctuating flow. There was always a drop of pressure that activated the mixer input pressure alarms.”

He approached WITT with this problem and WITT’s Indian service team came out with a solution – a WITT dome-loaded pressure regulator 737LE-HD/S. This regulator is designed to deliver stable outlet pressure irrespective of flow fluctuations, and irrespective of changes in upstream pressures.

### **MR. NIRAJ’S CONCLUSION:**

„With the WITT regulator, our customer has had trouble-free operation for almost a year, no production loss or downtime, with no stoppage of operation due to CO<sub>2</sub> supply failure, and no variation of outlet pressure with flow.“



### › **COMPLIANCE WITH ALL RELEVANT STANDARDS**

- WITT is certified to ISO 9001, ISO 22000 and PED 2014/68/EU module H
- All WITT Dome systems are CE-marked under supervision of TÜV (Germany’s Technical Inspection Association) and in accordance with PED 2014/68/EU
- ATEX 2014/34/EU certification also available, based on specific application, to EN 1127-1, DIN EN 13463-1 and ZH1/200
- Suitable for food applications, HACCP analysed
- Compliant with Regulation (EC) No. 1935/2004 and Regulation (EC) No. 2023/2006
- Meets requirements of German Food and Feed Code (LFGB)
- All materials in contact with O<sub>2</sub> are approved by German Federal Institute for Materials Research and Testing (BAM) per Code of Practice M034e (BGI 617e)
- The design of dome-loaded pressure regulators for oxygen over 1,450 psi (100 barg) has been subjected to Adiabatic Decompression testing by BAM per ISO 7291 clause 9.4.4

In addition,

- individual approvals for O<sub>2</sub> service have been granted by global industrial gas manufacturers (specific details available on request)

## OUR PRODUCT RANGE

### GAS CONTROL EQUIPMENT

- Gas mixing systems
- Gas metering systems
- Gas analysers
- Leak detection systems
- Gas pressure vessels
- Engineering of customized systems

### GAS SAFETY EQUIPMENT

- Flashback arrestors
- Non-return valves / check valves
- Quick couplers
- Safety relief valves
- Stainless steel devices
- Gas filters
- Pressure regulators
- Outlet points
- Lance holders
- Ball valves
- Automatic hose reels
- Test equipment
- Accessories
- Customized safety equipment

### WITT-Gasetechnik GmbH & Co KG

Salinger Feld 4-8  
58454 Witten  
Postfach 2550  
58415 Witten  
Deutschland  
Tel. +49 (0)2302 8901-0  
Fax +49 (0)2302 8901-3  
www.wittgas.com  
witt@wittgas.com

### WITT Gas Controls LP

380 Winkler Drive, Suite 200  
Alpharetta, GA 30004  
USA  
Tel. +1 888 948 8427  
Fax +1 877 948 8427  
witt-usa@wittgas.com

### GUSTUS & PARTNER GmbH

Installation – Service – Wartung  
Alt Salbke 6-10, Geb. 59  
39122 Magdeburg  
Deutschland  
Tel. +49 (0)391 4015246  
Fax +49 (0)391 4013296  
gustus@wittgas.com

### WITT Tecnología de Gas, S.L.

C/Simón Cabarga N° 2a – Bajo  
39005 Santander  
España  
Tel. +34 942 835142  
Fax +34 942 835143  
witt-espana@wittgas.com

### WITT FRANCE S.A.R.L.

131 Voie de Compiègne  
91390 Morsang sur Orge  
France  
Tel. +33 (0)160 151779  
Fax +33 (0)160 154782  
witt-france@wittgas.com

### WITT Gas Techniques Ltd.

Unit 7 Burtonwood Industrial Estate  
Phipps Lane, Burtonwood  
Warrington, Cheshire  
WA5 4HX  
Great Britain  
Tel. +44 (0)1925 234466  
Fax +44 (0)1925 230055  
witt-uk@wittgas.com

### WITT GAS INDIA PVT.LTD.

855/N, Upen Banerjee Road  
Kolkata 700060  
West Bengal  
India  
Tel. +91 9831319810  
witt-india@wittgas.com

### WITT ITALIA Srl.

Via Giovanni XXIII, 18  
24030 Solza (BG)  
Italia  
Tel. +39 035 4933273  
Fax +39 035 4948098  
witt-italia@wittgas.com

### WITT POLSKA Sp. z o. o.

ul. Legnicka 55/UA5  
54-203 Wroclaw  
Polska  
Tel. +48 (0)7135 22856  
Fax +48 (0)7135 13113  
witt-polska@wittgas.com

What are your requirements?

Please contact us.

Tel. +1 888 948 8427 | witt-usa@wittgas.com